




NBR Rubber Gasket Style 9210

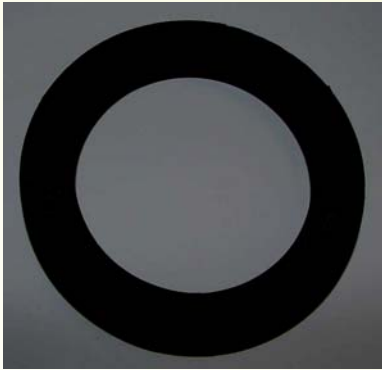

NBR Rubber Gasket Style 9210 is premium grade nitrile, 60 to 85 duro, generally resistance to most hydrocarbon, fats, oils, greases, hydraulic fluids, chemicals and solvents,

Technical Data Sheet

Type	: Nitrile
Color	: Black
Temperature Range (°C)	: - 29 °C to + 121 °C
Max. Pressure (bar)	: 17 bar
P x T max. (bar x °C)	: 800 bar x °C
Compression Set, ASTM Method B (%)	: 20 %
Elongation, min., (%)	: 500 %
Tensile Strength, min., ASTM D412, (N/mm²)	: 14 N/mm²
Hardness (Shore A)	: 60 to 85 ± 5 Shore A
Thickness available	: 0.5, 0.8, 1, 1.5, 2, 3, 5, 6, 8, 10 mm.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Khuner. Failure to select the proper sealing products could result in property damage and/or serious personal injury. Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing. While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice. Khuner is a registered trademark for packing, seals, gaskets, and other products of Khuner.